



TITLE

SPECIFICATIONS

PAGE 1/4

- 5A switching capability
- 1 form A and 1 form C
- Standard and sensitive coils available



1. TYPE: CW RELAY (P/C Board type)

2. COIL

1) Standard Type

COIL VOLTAGE (VDC)	PICK-UP VOLTAGE (VDC)	DROP-OUT VOLTAGE (VDC)	MAX-ALLOWABLE VOLTAGE (VDC)	COIL RESISTANCE (Ω)	COIL POWER (mW)
3	2.1	0.15	3.9	25 x (1±10%)	360
5	3.5	0.25	6.5	69 x (1±10%)	
6	4.2	0.30	7.8	100 x (1±10%)	
9	6.3	0.45	11.7	225 x (1±10%)	
12	8.4	0.60	15.6	400 x (1±10%)	
18	12.6	0.90	23.4	900 x (1±10%)	
24	16.8	1.20	31.2	1600 x (1±10%)	
48	33.6	2.40	62.4	6400 x (1±10%)	

(at 23°C)

2) High-Sensitive Type

COIL VOLTAGE (VDC)	PICK-UP VOLTAGE (VDC)	DROP-OUT VOLTAGE (VDC)	MAX-ALLOWABLE VOLTAGE (VDC)	COIL RESISTANCE (Ω)	COIL POWER (mW)
3	2.2	0.15	3.9	36 x (1±10%)	250
5	3.6	0.25	6.5	100 x (1±10%)	
6	4.3	0.30	7.8	145 x (1±10%)	
9	6.5	0.45	11.7	325 x (1±10%)	
12	8.6	0.60	15.6	575 x (1±10%)	
18	13.0	0.90	23.4	1300 x (1±10%)	
24	17.3	1.20	31.2	2310 x (1±10%)	
48	34.6	2.40	62.4	9220 x (1±10%)	

(at 23°C)



TITLE

SPECIFICATIONS

PAGE 2/4

3. CONTACTS

- 3-1) Contact arrangement : 1 Form A, 1 Form C
- 3-2) Contact Material : AgNi, AgCdO, AgSnO₂
- 3-3) Contact resistance : 100mΩ at 1A 6VDC
- 3-4) Contact ratings (Resistive load) :
NO: 5A 250VAC/30VDC, NC: 3A 250VAC/30VDC
- 3-5) Max. switching voltage : 250VAC/30VDC
- 3-6) Max. switching current : 5A
- 3-7) Max. switching power : 1250VA/150W

4. CHARACTERISTICS

- 4-1) Operate time (at nomi. volt.) : Max. 10msec
- 4-2) Release time (at nomi. volt.) : Max. 5msec
- 4-3) Insulation resistance : 1000MΩ (at 500VDC)
- 4-4) Dielectric strength
 - ⊙ Between open contacts : AC 1,000 Volt / one minute
 - ⊙ Between coil and contacts : AC 2,000Volt / one minute
- 4-5) Vibration resistance : 10 to 55Hz 3.3mm DA
- 4-6) Shock resistance
 - ⊙ Functional : 100m/s²
 - ⊙ Destructive : 500m/s²
- 4-7) Ambient temperature : -40 to + 85℃
- 4-8) Humidity : 45 to 85% RH
- 4-9) Life expectancy
 - ⊙ Mechanical : 1x10⁷ operations
 - ⊙ Electrical : 1x10⁵ operations
- 4-10) Weight : Approx. 8g
- 4-11) Outline dimension (L x W x H) : 20.5 x 10.5 x 20.5mm
- 4-12) Safety standard : cUL




TITLE

SPECIFICATIONS

PAGE 3/4

5. ORDERING INFORMATION

EX.) CW 1 - M 12 S H


Contact arrangement	Contact Current	Coil Voltage	S :	Nil: Standard H: High-Sensitive
1 : SPDT(1C) 11 : SPST(1A)	M : 5A	3, 5, 6, 9, 12, 18, 24, 48 VDC	Plastic sealed type	

**** Disclaimer ****

This data sheet is for the customer's reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all parameters for every possible application. Thus the user should be in right position to choose the suitable product for own application. If there is any query, please contact to Texcell Netcom Co., Ltd. for the technical service. However, it is the user's responsibility to determine which product should be used only.

TO:	DATE:
TEXCELL NETCOM CO., LTD.	DRAWN BY: CHECKED BY:
DEVELOPMENT DEPT.	APPROVED BY:



TITLE

DIMENSIONS



PAGE 4/4

Outline Dimensions




Wiring Diagram (Bottom view)

PCB Layout (Bottom view)

1 Form A

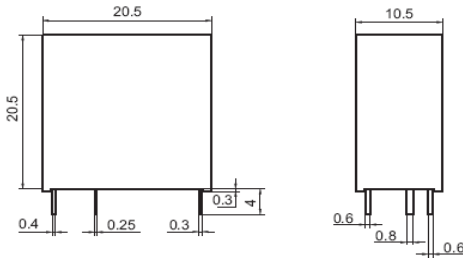


1 Form C

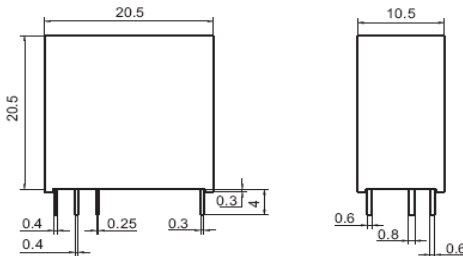


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) The width of the gridding is 2.54mm.

ENDURANCE CURVE

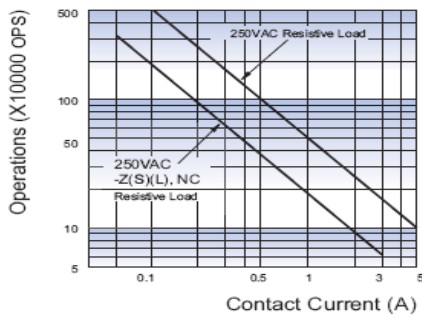

COIL TEMPERATURE RISE

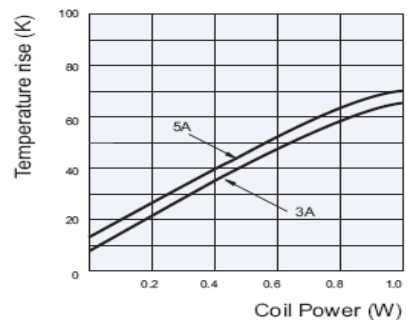

TO:

TEXCELL NETCOM CO., LTD.
DEVELOPMENT DEPT.

DATE:

DRAWN BY:
APPROVED BY:

CHECKED BY: